


Hydraulic Cylinders | 50 – 150 Tonnes | RSLC Series | Single Acting - Locking

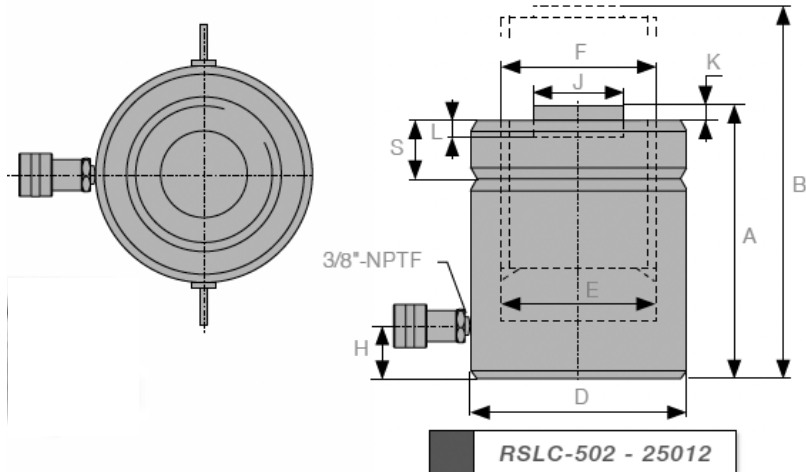

NOTE: Additional sizes available for rent.
Consult LGH for availability.

Specifications

Model	Cylinder Cap. Tonnes (Max)	Stroke (mm)	Cylinder Effective Area (cm.2)	Oil Cap. (cm.3)	A Collapsed Height (mm)	B Extended Height (mm)	D Outside Dia. (mm)	E Cylinder Bore Dia. (mm)	F Piston Rod Dia. (mm)	H Base to Advance Port (mm)	J Saddle Dia. (mm)	K Saddle Protrusion from Piston (mm)	L Depth of Piston Rod Hole (mm)	S Lock Ring Height (mm)	Weight (kg)
RSLC-502	50	50	70.9	355	164	214	125	95.0	TR95x4	30	71	2	13	36	15.0.
RSLC-504		100	70.9	708	214	314	125	95.0	TR95x4	30	71	2	13	36	20.0
RSLC-506		150	70.9	1,063	264	414	125	95.0	TR95x4	30	71	2	13	36	25.0
RSLC-508		200	70.9	1,417	314	514	125	95.0	TR95x4	30	71	2	13	36	30.0
RSLC-5010		250	70.9	1,771	364	614	125	95.0	TR95x4	30	71	2	13	36	35.0
RSLC-5012		300	70.9	2,125	414	714	125	95.0	TR95x4	30	71	2	13	36	40.0
RSLC-1002	100	50	132.7	664	187	237	165	130.0	TR130x6	30	71	2	13	44	30.0
RSLC-1004		100	132.7	1,327	237	337	165	130.0	TR130x6	30	71	2	13	44	39.0
RSLC-1006		150	132.7	1,990	287	437	165	130.0	TR130x6	30	71	2	13	44	48.0
RSLC-1008		200	132.7	2,653	337	537	165	130.0	TR130x6	30	71	2	13	44	56.0
RSLC-10010		250	132.7	3,317	387	637	165	130.0	TR130x6	30	71	2	13	44	64.0
RSLC-10012		300	132.7	3,980	437	737	165	130.0	TR130x6	30	71	2	13	44	73.0
RSLC-1502	150	50	198.6	993	209	259	205	159.0	TR159x6	39	130	2	25	44	53.0
RSLC-1504		100	198.6	1,985	259	359	205	159.0	TR159x6	39	130	2	25	44	66.0
RSLC-1506		150	198.6	2,977	309	459	205	159.0	TR159x6	39	130	2	25	44	78.0
RSLC-1508		200	198.6	3,969	359	559	205	159.0	TR159x6	39	130	2	25	44	92.0
RSLC-15010		250	198.6	4,961	409	659	205	159.0	TR159x6	39	130	2	25	44	104.0
RSLC-15012		300	198.6	5,954	459	759	205	159.0	TR159x6	39	130	2	25	44	117.0

Green shading reflects rental inventory.