

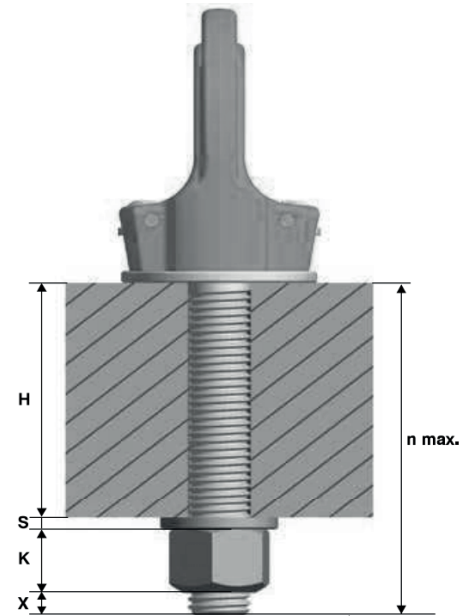


Eyebolts | 0.3t - 12t | PLGW Supreme

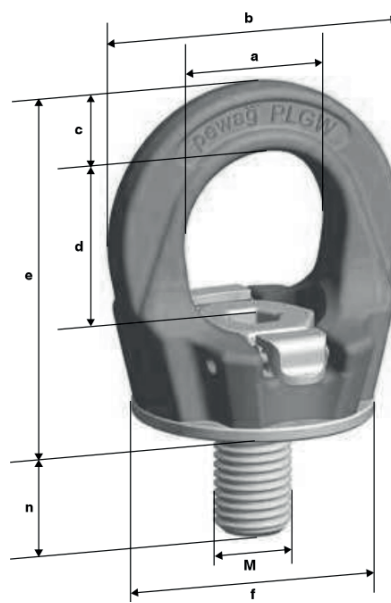

Method of lifting
Number of legs
Angle of inclination



Specifications (mm)

Code	Thread (mm)	Fastening torque (Nm)	Load capacity (kg)	Load capacity (kg)								
PLGW 0,3 t	M8	Simply tighten by hand	1,000	300	2,000	600	420	300	630	450	300	300
PLGW 0,5 t	M10		1,500	500	3,000	1,000	700	500	1,060	750	500	500
PLGW 0,7 t	M12		2,000	700	4,000	1,400	980	700	1,480	1,050	700	700
PLGW 1,5t	M16		4,000	1,500	8,000	3,000	2,100	1,500	3,180	2,200	1,500	1,500
PLGW 2,3t	M20		5,000	2,300	10,000	4,600	3,200	2,300	4,800	3,400	2,300	2,300
PLGW 3,2t	M24		6,500	3,200	13,000	6,400	4,500	3,200	6,700	4,800	3,200	3,200
PLGW 4t	M30		12,000	4,000	24,000	8,000	5,600	4,000	8,200	6,000	4,000	4,000
PLGW 4,9t	M30		12,000	4,900	24,000	9,800	6,900	4,900	10,300	7,300	4,900	4,900
PLGW 7t	M36		15,000	7,000	30,000	14,000	9,800	7,000	14,800	10,500	7,000	7,000
PLGW 9t	M42		22,000	9,000	44,000	18,000	12,600	9,000	19,000	13,500	9,000	9,000
PLGW 12t	M48		30,000	12,000	60,000	24,000	16,900	12,000	25,400	18,000	12,000	12,000

Green shading reflects rental inventory.

Specifications (mm)

Code	Thread (mm)	Load capacity (kg)	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	n (mm)	n max (mm)	Ø (mm)	Weight (kg/pc.)
PLGW 0,3 t	M8	300	25	45	10	27	53	35	15	90	6	0.20
PLGW 0,5 t	M10	500	25	45	10	27	53	35	15	160	6	0.21
PLGW 0,7 t	M12	700	30	55	12	32	63	43	20	160	8	0.32
PLGW 1,5t	M16	1,500	35	64	14	36	70	50	25	160	10	0.48
PLGW 2,3t	M20	2,300	40	73	16	41	81	54	30	160	12	0.58
PLGW 3,2t	M24	3,200	50	86	18	50	93	69	35	-	14	1.10
PLGW 4t	M30	4,000	60	110	25	60	114	90	45	-	17	2.20
PLGW 4,9t	M30	4,900	60	110	25	60	114	90	45	-	17	2.20
PLGW 7t	M36	7,000	70	132	31	70	136	108	55	-	19	3.80
PLGW 9t	M42	9,000	80	152	36	72	153	126	65	-	22	5.70
PLGW 12t	M48	12,000	95	179	42	88	179	148	75	-	24	8.90

Green shading reflects rental inventory.